GA-55

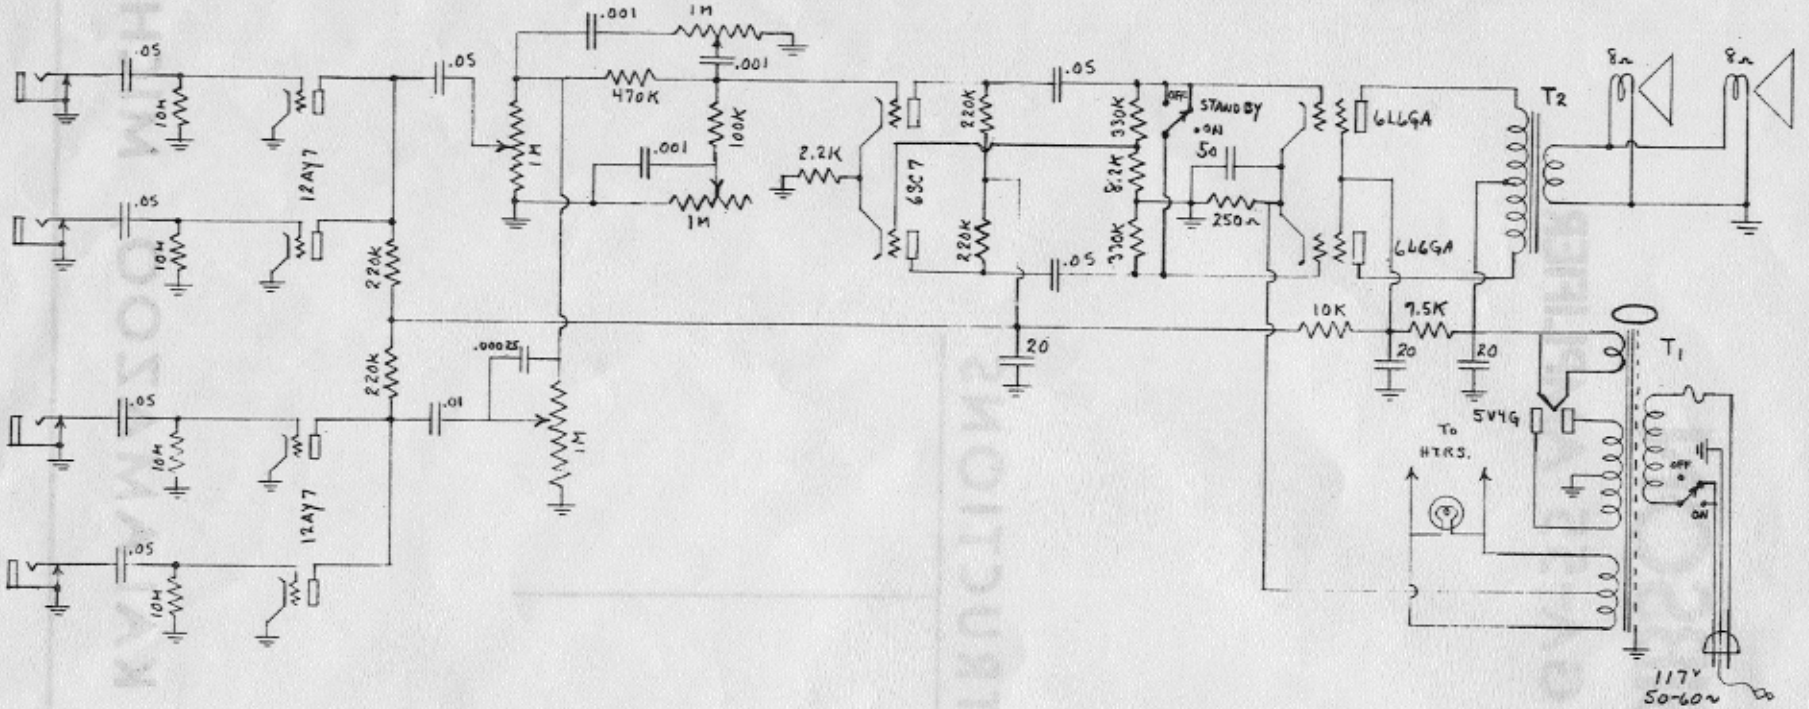

Voltages to Chassis using 20,000 Ω/V meter.

Tube	Use	Plate	Screen	Cathode	Plate	Screen	Cathode
5V4G	Rectifier	300VAC	—	360	300VAC	—	360
6L6GA	OUTPUT	355	305	25			
6L6GA	OUTPUT	355	305	25			
6SC7	φ INVERTER	160	—	1.85	160	—	1.85
12AY7	INST.	40	—	0.0	40	—	0.0
12AY7	MIC	40	—	0.0	40	—	0.0
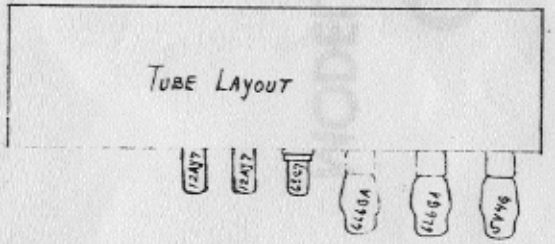
Normal voltages may vary 20% with normal tubes in resistance Coupled stages